
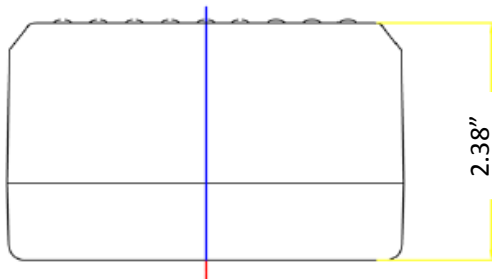


SolaRight Lighting™ Model NST44 Specifications
Internally Illuminated Solar Lighted Paver

Dimensions

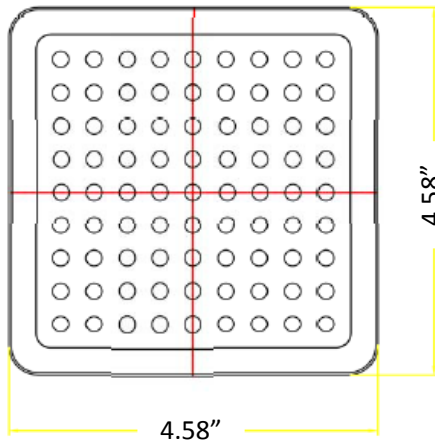

Dimensions shown include SSSL SUS case

Specifications

Technology	Pseudocapacitor
Full Sun Charge Time	3 Hours
Overcast Charge Time	8 Hours
Discharge Time	Up to 16 Hours
Voltage/Bonding Requirements	2.3V/No Bonding
Snowplowable	No
Housing Material	Stainless Steel
Lens Material	Polycarbonate
Seal Rating	IP 68
Compressive Strength (LBF)	69,872 N
Operating Temperature	-40F to 158F
LED Direction	Single
Number of LEDs	4
Activation	Dusk-to-Dawn
Color Options	RGB, White, Red, Green, Blue, Yellow
Function Options	RGB, Steady, Slow Flash, Fast Flash
Country of Origin	Korea

Luminance (LUX Average)

Red	6.1
Green	10.9
Blue	1.2
Yellow	4.5
White	10.9



SolaRight Lighting
5600 N. May Ave Ste. 100
Oklahoma City, OK 73112
405.673.8687 / www.solarrightlighting.com