
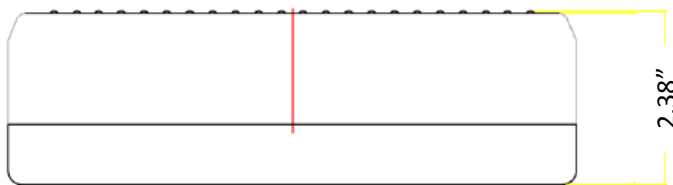


**SolaRight Lighting™ Model NST48 Specifications**  
Internally Illuminated Solar Lighted Paver

**Dimensions**

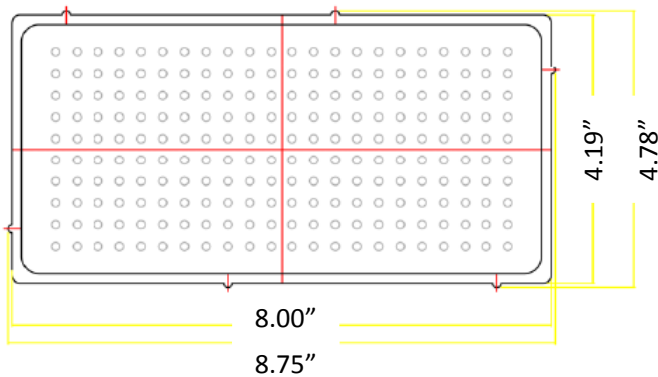

Dimensions shown include SSTL SUS case

**Specifications**

Technology	Pseudocapacitor
Full Sun Charge Time	3 Hours
Overcast Charge Time	8 Hours
Discharge Time	Up to 16 Hours
Voltage/Bonding Requirements	2.3V/No Bonding
Snowplowable	No
Housing Material	Stainless Steel
Lens Material	Polycarbonate
Seal Rating	IP 68
Compressive Strength (LBF)	36,187 N
Operating Temperature	-40F to 158F
LED Direction	Single
Number of LEDs	4
Activation	Dusk-to-Dawn
Color Options	RGB, White, Red, Green, Blue, Yellow
Function Options	RGB, Steady, Slow Flash, Fast Flash
Country of Origin	Korea

**Luminance (LUX Average)**

Red	4.7
Green	18.2
Blue	1.6
Yellow	5.1
White	21.1



SolaRight Lighting  
5600 N. May Ave Ste. 100  
Oklahoma City, OK 73112  
405.673.8687 / [www.solarightlighting.com](http://www.solarightlighting.com)