


\*Dimensions and illustrations are approximate and for reference only

## Sequence® 4000 Series - Model 5000SEQ20

The expansive design will meet today's increased market demand for performance on all levels. Peak performance of 5000 Gallons Per Hour while only requiring 263 Watts.

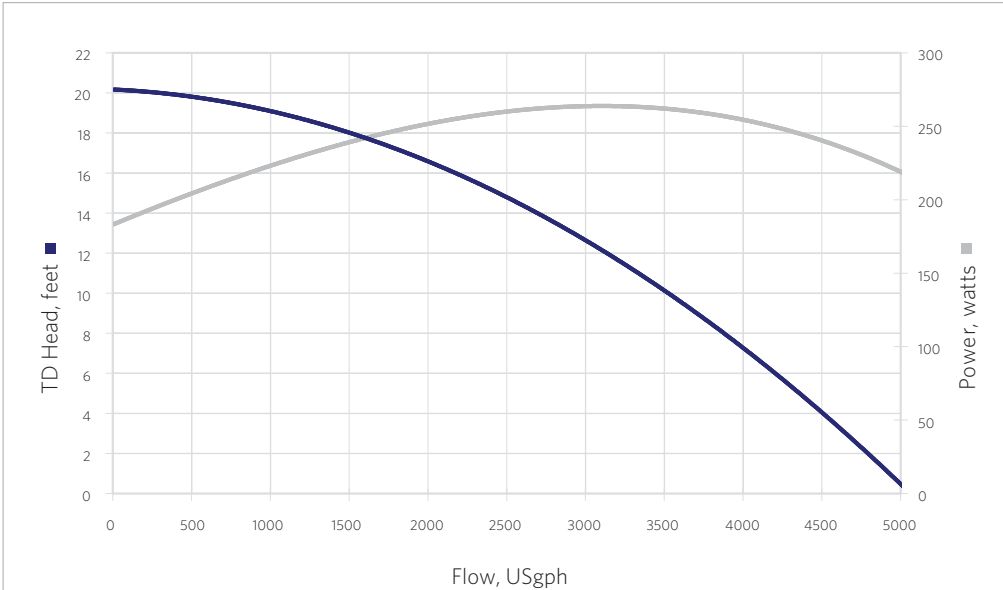

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	75	64	52	36	2
GPH	4500	3840	3120	2160	120



3 YEAR LIMITED WARRANTY



8 FOOT CORDSET



TEFC FANCOOLED MOTOR

MODEL	5000SEQ20
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	5000
MAX HEAD (feet)	20.2'
MAX POWER (watts)	263
MAX CURRENT (amps)	2.3
@ (volts)	115
MOTOR HP	¼
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	5